


ELBA POLYSYN GREASE

Elba PolySyn 2 is Synthetic Polyurea grease designed for use in rolling bearings operating under extreme temperature. The organic Polyurea thickener system contains no metals ions which act as catalyst for oxidation.

Elba PolySyn 2 is particularly beneficial for the long term lubrication of rolling and ball bearings in electric motors, fans and air conditioned. The extended service temperature range of -27°F to 320°F and high speed factor of 700,000 nDm.

Elba PolySyn 2 ideal lubricating grease for electric motors bearings designed to be lubricated for life.

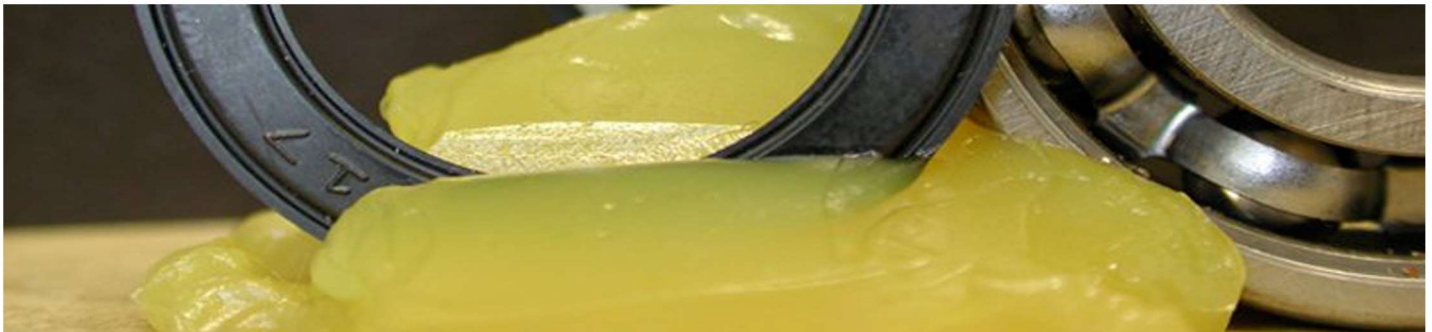

Physical Properties

Color	Beige
Thickener	Polyurea
Texture	Homogenous
NLGI	2
Base oil	Synthetic hydrocarbon
Base oil properties ASTM D 446	
Viscosity at 40°C cSt	110
Viscosity at 100°C cSt	12
Viscosity Index	90
Service Temperature	-27°F to 320°F
Worked Penetration	265-295
Drop Point	250°C
Weld load	160 kg
Oil separation ASTM D 6184	<5
4-Ball Wear - ASTM D 2266	0.50mm, 0.54mm
Corrosion ASTM D 1743	pass
Corrosion ASTM D 6138 EMCOR	I
Copper corrosion-ASTM D 4048	Ia

For Technical, Quality or Product Safety Questions Please Contact:

Elba Lubrication Inc., New York / United States of America
Phone + 1-631-759-1014
info@elba-lubes.com

The data presented in this medium are in accordance with the present state of our knowledge but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this medium should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. The information provided by us does not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose.

ELBALUBES™ | Most Recent Change: 01.07.2022

